

UR SERIES / MANUALLY PROPELLED SLIDING RAIL

The UR low level access series are direct ladder replacement work platforms with working heights ranging from 4.7m to 5.9m. They provide a much safer working environment than ladders when working at heights and minimize the risk of injury, with the platform providing a safe and secure working area. Power is provided by a 12 volt 110Ah maintenance free Absorbed Glass Mat (AGM) battery.

Key Features

- Highly reliable European hydraulic system
- Quick & Smooth platform ascent & descent
- Up to 200 operating cycles per full charge
- Light weight & compact footprint
- Low stored height, under 2m standard doorways
- Battery charge & voltage indication
- Hour meter
- Forklift pockets & tool box
- Use of easily understood picture decals
- QR code provided for on-line instructions
- Non marking wheels


Safety Features

- Emergency stop buttons
- Audible & visual tilt alarm
- Descent alert - audible
- Emergency down valve
- Overload pressure by-pass
- Low voltage battery alarm - audible & visual
- Spirit level indicator
- Explosion relief valve
- Non Slip platform & secure gating
- Safety harness point on compliant platform & rails
- Auto-braking as well as manual brake

PRONTO

ACCESS EQUIPMENT

KEY TECHNICAL SPECIFICATIONS

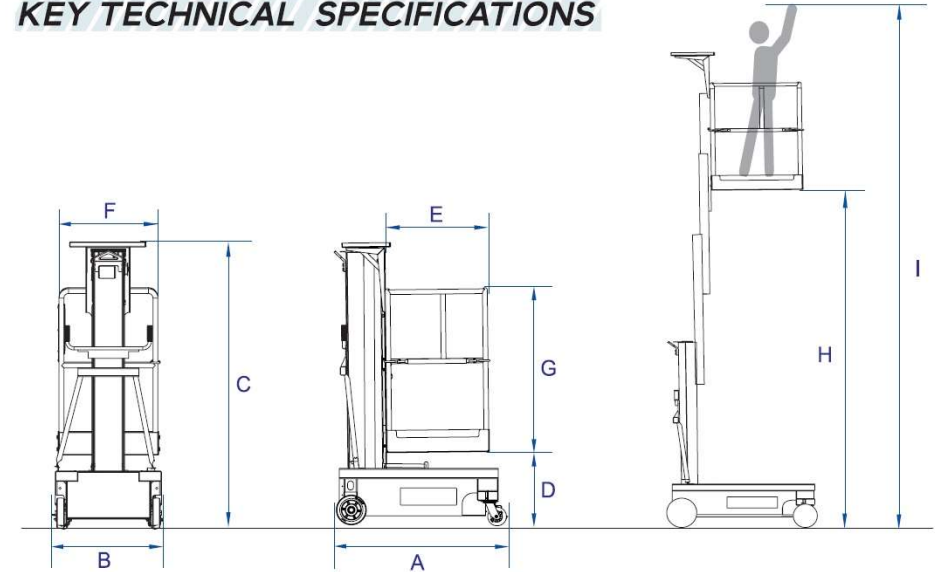

Model	UR8	UR10	UR12
Max Platform Height (m) H	2.7	3.0	3.9
Max Working Height (m) I	4.7	5.0	5.9
Rated Load (kg)	159	159	159
Stored Dimensions (m) A*B*C	1.12x0.7x1.85	1.12x0.7x1.85	1.12x0.7x1.85
Platform Dimensions (m) E*F*G	0.68x0.66x1.1	0.68x0.66x1.1	0.68x0.66x1.1
Battery (V/Ah)	12 / 110	12 / 110	12 / 110
Total Weight (kg)	311	335	365
Power Rating (kW)	1.2	1.2	1.2
Foot Print (m)	0.60x0.96	0.60x0.96	0.60x0.96
Initial Platform Height (m) D	0.4	0.4	0.4
Platform Travel (m)	2.3	2.6	3.5
Max. Allowable Manual Force (N)	200	200	200
Max. Allowable Inclination of Chassis (deg.)	1.5	1.5	1.5

Company reserves the right to change product design & technical features without prior notice.